

AD-A118 015

DRSAR-LEP-L

RI

AD A-118 015

CHEMICAL SYSTEMS LABORATORY TECHNICAL REPORT

ARCSL-TR-82075

SAFETY CONSIDERATIONS IN THE DESIGN OF RIOT-CONTROL GRENADES

by

Randel E. Willhite

Safety Office

TECHNICAL
LIBRARY

August 1982



US ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND

Chemical Systems Laboratory

Aberdeen Proving Ground, Maryland 21010



Approved for public release; distribution unlimited.

Disclaimer

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Disposition

Destroy this report when it is no longer needed. Do not return to it to the originator.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER ARCSL-TR-82075	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) SAFETY CONSIDERATIONS IN THE DESIGN OF RIOT-CONTROL GRENADES		5. TYPE OF REPORT & PERIOD COVERED Technical Report September 1981
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) Randel E. Willhite		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Commander, Chemical Systems Laboratory ATTN: DRDAR-CLF Aberdeen Proving Ground, Maryland 21010		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS Commander, Chemical Systems Laboratory ATTN: DRDAR-CLJ-R Aberdeen Proving Ground, Maryland 21010		12. REPORT DATE August 1982
		13. NUMBER OF PAGES 18
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE NA
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) M47 M7A3 M25A2 Riot-control grenades Grenades O-chlorobenzalmalononitrile CS		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) This report evaluates the functional safety of the three riot-control grenades (i.e., the M7A3, M25A2, and M47) currently in the Army inventory. This report shows that there is a sufficient data base to perform a safety analysis, and that the analysis does provide specific, safety design criteria for developmental riot-control grenades.		

PREFACE

The work described in this report was conducted in support of the M47 Riot Control Grenade Program. The work was done in September 1981.

Reproduction of this document in whole or in part is prohibited except with the permission of the Commander, Chemical Systems Laboratory, ATTN: DRDAR-CLJ-R, Aberdeen Proving Ground, Maryland 21010. However, the Defense Technical Information Center and the National Technical Information Service are authorized to reproduce the document for United States Government purposes.

CONTENTS

		<u>Page</u>
1	INTRODUCTION.....	7
2	EVALUATION.....	7
2.1	The Mission of Riot-Control Munitions.....	7
2.2	Description of Recent Riot-Control Grenades.....	7
2.3	Evaluation of the Incapacitating Compound.....	10
2.4	Evaluation of the Fuze/Dissemination Mechanism.....	10
2.5	Evaluation of the Grenade Body.....	12
3	SUMMARY.....	12
4	CONCLUSIONS.....	13
5	RECOMMENDATIONS.....	13
	DISTRIBUTION LIST.....	15

LIST OF FIGURES

<u>Figure</u>		
1	M7A3 Grenade.....	8
2	M25A2 Grenade.....	9
3	M47 Grenade.....	9
4	Grenades with Standard, Fuze Safety Lever.....	11

SAFETY CONSIDERATIONS IN THE DESIGN OF RIOT-CONTROL GRENADES

1. INTRODUCTION

One of the primary, system safety program objectives stated in MIL-STD-882A is defining a systematic approach to insure that historical safety data is considered and used in the design of new systems. This is an important objective, because it can provide design engineers with specific, safety design criteria for a new system. Too often the words "will present no unacceptable hazard" appear in a requirements document. This phrase is ambiguous and of little help to the design engineer in determining an appropriate design for a system. This study of riot-control grenades shows how historical safety data from previous riot-control grenades can be used to develop specific, safety design criteria for riot-control grenades in development.

2. EVALUATION

2.1 The Mission of Riot-Control Munitions.

Over the years, the Army has developed a variety of riot-control munitions to perform the riot-control mission. Unlike most munitions, riot-control munitions have a dual mission. They must be capable of being used in both a tactical, military situation and in a civil-disturbance situation. The first mission requires a munition that meets the safety requirements of any Army system; i.e., the munition must be safe during manufacture, transportation, storage, use, and disposal.

The second mission requires a munition which is not only safe to the user, but a munition that is safe to the target (often civilian) personnel as well. The munition must incapacitate the target personnel without presenting any unacceptable or residual hazards to the target personnel or the environment.

2.2 Description of Recent Riot-Control Grenades.

A prerequisite for the use of historical safety data in developing safety design criteria for a system is that a sufficient data base must already exist. In the case of riot-control grenades, the Army has developed and used three different riot-control grenades in recent years. The experience gained through use of these three grenades provides the data base for this study.

The first grenade used in recent years was the M7A3 "beer can" grenade (figure 1). The M7 was eventually replaced by the M25A2 "explosive disseminating" grenade (figure 2). The final grenade, developed to replace both the M25A2 and the M7A3, was the M47 "softball" grenade (figure 3). All these grenades consisted of three major components: the fill material (incapacitating compound) the fuze/dissemination mechanism, and the body.

Breaking the grenade into these three components is the first step to developing specific, safety design criteria. The next step is to evaluate the historical safety data, as it pertains to each of these components. Based on this data, safety design criteria for that component of a developmental riot-control grenade can be determined.



Figure 1. M7 Series Riot Control Grenade



Figure 2. M25 Series Riot Control Grenade



Figure 3. M47 Riot Control Grenade

2.3 Evaluation of the Incapacitating Compound.

The first component to be evaluated is the incapacitating compound. The inherent hazards associated with the use of any chemical compound, (i.e., flammability, toxicity, reactivity, and environmental impact) must be considered when employing the incapacitating compound in a system. Since 1959, the incapacitating compound used in riot-control grenades has been powdered o-chlorobenzalmalonitrile (CS). CS has proven to be a reliable riot-control incapacitating compound which incapacitates target personnel without producing any residual health hazards. Its use, however, does result in an environmental hazard because of its persistency and problems in decontamination. Safety design requirements of a developmental riot-control grenade should address this particular hazard. An appropriate requirement would be that:

(a) The incapacitating compound that is used must not present any greater health hazards than CS.

(b) The incapacitating compound must not present a persistent environmental hazard.

These requirements are, in fact, presently being addressed at Chemical Systems Laboratory (CSL).

2.4 Evaluation of the Fuze/Dissemination Mechanism.

The second component to be evaluated is the fuze/dissemination mechanism. The most significant changes in riot-control grenades have been to this component. The M7A3 grenade used a pyrotechnic fuze with a pyrotechnics-coated CS fill. The fuze ignited the pyrotechnic coating on the CS which, as it burned, volatilized the CS. The CS was then emitted as a smoke through emission ports (holes) in the top of the grenade. This design resulted in a severe fire hazard, caused by the high heat generated at the emission ports. If the grenade was used in locations containing combustible materials, such as houses, stores, apartment buildings, and fields, the resulting fires could produce extensive property damage.

To eliminate this hazard and another hazard discussed in paragraph 2.2.3, the M25A2 grenade was designed, which explosively disseminated the CS. To control the fragment hazard to target personnel associated with fragmenting grenades, the grenade was designed with plastic parts. As an added safety precaution, the users were instructed to throw the grenade upwind of the intended target in civilian disturbances.

This new design eliminated the fire hazard of the previous grenade, but introduced two new hazards. First, the M25A2 grenade had a different fuze which did not incorporate the standard, fuze safety lever (figure 4). The new fuze required the user to maintain pressure on the arming sleeve at the top of the grenade until the grenade was thrown (figure 2). This fuze design resulted in injuries to the user, because the user would not maintain the required pressure after removing the safety pin. The grenade would then begin to function in the thrower's hand and explode in, or inches from, the thrower's hand and arm.

The second hazard identified during use of the M25A2 grenade was the accidental functioning of the grenade with the safety pin intact. If the grenade was dropped onto a hard surface, the plastic fuze housing would break and the grenade would subsequently function. Because of these hazards, the M25A2 grenade was type reclassified "obsolete" and work was begun on a new riot-control grenade, the M47.

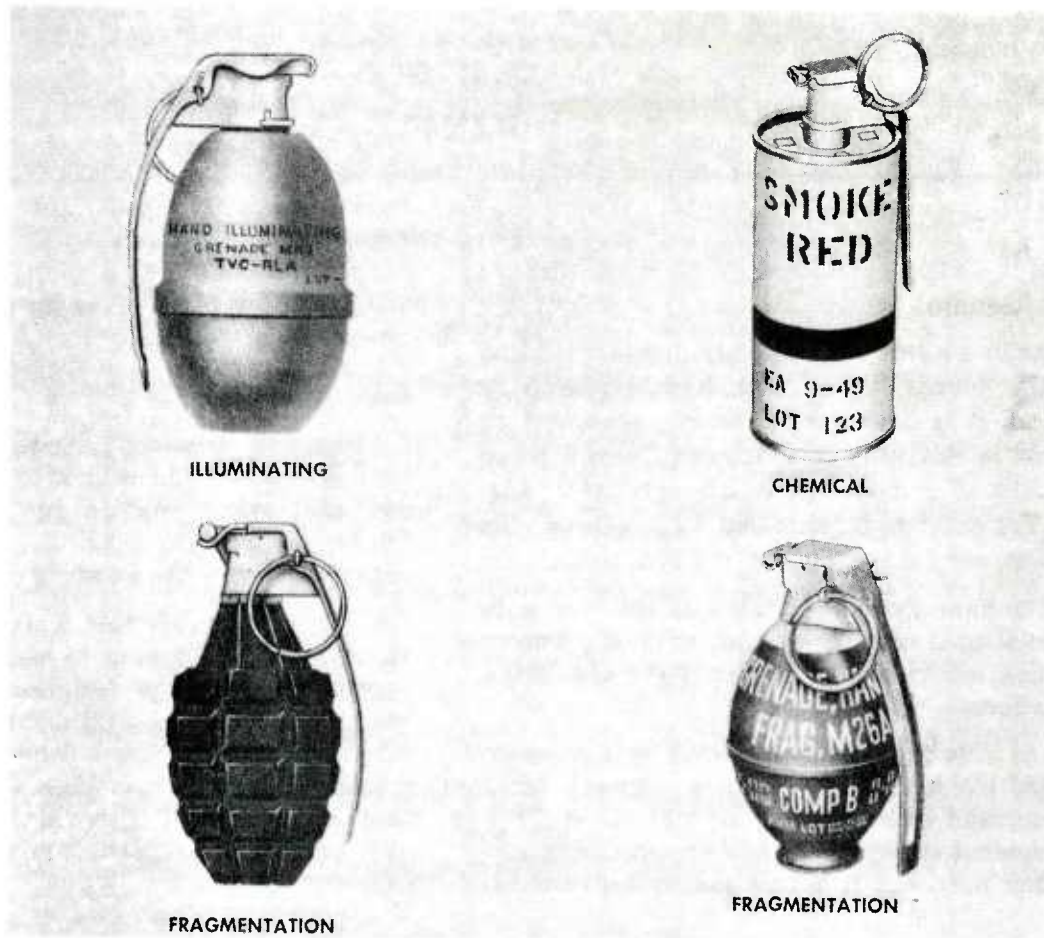


Figure 4. Grenades with Standard Fuze Safety Lever

The M47 riot-control grenade employed pyrotechnic dissemination of CS. To overcome the fire hazard inherent in the M7A3 grenade, this grenade had a spherical body which allowed the grenade to skitter as it disseminated the CS. The fuze design returned to use of the standard grenade safety lever, and a second safety device was incorporated. When the grenade functioned properly, it did not present any hazards to either the user or target personnel. During initial production testing, a fragment hazard to target personnel was identified in the event of a "hangfire". The arming pin, which is normally ejected with the handle when the grenade is released from the thrower's hand, did not eject, in some cases, until the grenade hit the ground. Were this to occur in the vicinity of the target personnel, the arming pin would present a significant eye hazard to the target personnel. Identification and evaluation of this hazard led to a redesign of the fuze/dissemination mechanism for the M47 grenade. This effort is currently in progress.

Based upon this evaluation of the historical safety data pertaining to the fuze/dissemination mechanism, the safety design criteria for this component of a developmental riot-control grenade can be established. The developmental grenades should meet the following requirements:

(a) The grenade must not present a fire hazard when used in its intended operating environments.

* (b) The grenade must not produce hazardous fragments during normal functioning.

(c) The fuze design must be similar in appearance and operation to standard hand grenades.

(d) The grenade must be fail-safe to both the user and target personnel should a hangfire or dud occur.

2.5 Evaluation of the Grenade Body.

The third component to be evaluated is the grenade body. The M7A3 grenade used a metal "beer can" type body. This body was both an impact hazard to target personnel and to user personnel if the grenade was thrown back by the target personnel. The M25A2 grenade eliminated this hazard by explosively disseminating the CS, and thus eliminating any components that could be thrown back. When it was decided to design a third riot-control grenade, deploying CS in the same way as the M7A3 grenade, this hazard had to be eliminated in another way. The M47 grenade used a soft-rubber body, which effectively eliminated any impact hazard to either the target personnel or the user. Any developmental riot-control grenade should include the following requirement to ensure that the level of safety achieved in M47 body design is not degraded in a subsequent design. The grenade must not present an impact hazard to either target personnel or user personnel.

3. SUMMARY

By systematically evaluating the historical safety data generated from use of previous riot-control grenades, specific, safety design criteria for a new grenade has been established. The resultant design criteria obtained from this evaluation are summarized below.

(a) The incapacitating compound must not present any greater health hazards than CS.

(b) The incapacitating compound must not present a persistent environmental hazard.

(c) The grenade must not present a fire hazard when used in its intended operating environments.

(d) The grenade must not produce hazardous fragments during normal functioning. *

(e) The fuze design must be similar in appearance and operation to standard hand grenades. *

(f) In the event of a hangfire or dud, the grenade must be fail safe to both the user and target personnel.

(g) The grenade body must not present an impact hazard to either target or user personnel.

4. CONCLUSIONS

4.1 A sufficient data base exists to perform a safety analysis of previously fielded riot-control grenades.

4.2 A systematic approach, based on historical safety data, can be used to develop specific safety design criteria for developmental riot-control grenades.

5. RECOMMENDATIONS

5.1 The requirements established in this report should be included in the design requirements of developmental riot-control grenades.

5.2 A detailed hazard analysis should be performed to provide even more specific and complete safety design requirements for developmental riot-control grenades.

DISTRIBUTION LIST 5

Names	Copies	Names	Copies
CHEMICAL SYSTEMS LABORATORY			
ATTN: DRDAR-CLB	1	HQ Sixth US Army	
ATTN: DRDAR-CLB-C	1	ATTN: AFKC-OP-NBC	1
ATTN: DRDAR-CLB-R	1	Presidio of San Francisco, CA 94129	
ATTN: DRDAR-CLB-T	1	Commander	
ATTN: DRDAR-CLB-TE	1	DARCOM, STITEUR	
ATTN: DRDAR-CLC-B	1	ATTN: DRXST-STI	1
ATTN: DRDAR-CLC-C	1	Box 48, APO New York 09710	
ATTN: DRDAR-CLF	1		
ATTN: DRDAR-CLJ-R	2	Commander	
ATTN: DRDAR-CLJ-L	2	USASTCFEO	
ATTN: DRDAR-CLJ-M	1	ATTN: MAJ Mikeworth	1
ATTN: DRDAR-CLN	1	APO San Francisco 96328	
ATTN: DRDAR-CLN-S	1		
ATTN: DRDAR-CLN-ST	1	Army Research Office	
ATTN: DRDAR-CLT	1	ATTN: DRXRO-CB (Dr. R. Ghirardelli)	1
ATTN: DRDAR-CLY-A	1	P.O. Box 12211	
ATTN: DRDAR-CLY-R	1	Research Triangle Park, NC 27709	
AUTHOR(S) COPIES:			
Safety Office	13	OFFICE OF THE SURGEON GENERAL	
RECORD SET: ATTN: DRDAR-CLF	1	Commander	
DEPARTMENT OF DEFENSE		US Army Medical Bioengineering Research and Development Laboratory	
Defense Technical Information Center		ATTN: SGRD-UBD-AL, Bldg 568	1
ATTN: DTIC-DDA-2	12	Fort Detrick, Frederick, MD 21701	
Cameron Station, Building 5		Commander	
Alexandria, VA 22314		USA Medical Research Institute of Chemical Defense	
Director		ATTN: SGRD-UV-L	1
Defense Intelligence Agency		Aberdeen Proving Ground, MD 21010	
ATTN: DB-4G1	1	Commandant	
Washington, DC 20301		Academy of Health Sciences, US Army	
DEPARTMENT OF THE ARMY		ATTN: HSHA-CDH/IPM	2
HQDA (DAMO-NCC)	1	Fort Sam Houston, TX 78234	
WASH DC 20310		US ARMY MATERIEL DEVELOPMENT AND READINESS COMMAND	
HQDA		Commander	
ATTN: DAMO-NC	1	US Army Materiel Development and Readiness Command	
WASH DC 20310		ATTN: DRCLDC	1
HQ DA		ATTN: DRCSF-P	1
Office of the Deputy Chief of Staff for Research, Development & Acquisition		5001 Eisenhower Ave	
ATTN: DAMA-CSS-C	1	Alexandria, VA 22333	
Washington, DC 20310			

Project Manager Smoke/Obscurants		Director	
ATTN: DRCPM-SMK	3	USA Ballistic Research Laboratory,	
Aberdeen Proving Ground, MD 21005		ARRADCOM	
		ATTN: DRDAR-TSB-S	1
Commander		Aberdeen Proving Ground, MD 21005	
US Army Foreign Science & Technology Center		US ARMY ARMAMENT MATERIEL READINESS	
ATTN: DRXST-ITC	1	COMMAND	
220 Seventh St., NE			
Charlottesville, VA 22901		Commander	
		US Army Armament Materiel Readiness Command	
Director		ATTN: DRSAR-ASN	1
US Army Materiel Systems Analysis Activity		ATTN: DRSAR-IRI-A	1
ATTN: DRXSY-MP	1	ATTN: DRSAR-LEP-L	1
ATTN: DRXSY-CA (Mr. Metz)	2	ATTN: <u>DRSAR-SF</u>	1
Aberdeen Proving Ground, MD 21005		Rock Island, IL 61299	
Commander		Commander	
US Army Missile Command		US Army Dugway Proving Ground	
Redstone Scientific Information Center		ATTN: Technical Library (Docu Sect)	1
ATTN: DRSMI-RPR (Documents)	1	Dugway, UT 84022	
Redstone Arsenal, AL 35809		US ARMY TRAINING & DOCTRINE COMMAND	
Director		Commandant	
DARCOM Field Safety Activity		US Army Infantry School	
ATTN: DRXOS-SE (Mr. Yutmeyer)	1	ATTN: CTDD, CSD, NBC Branch	1
Charlestown, IN 47111		Fort Benning, GA 31905	
US ARMY ARMAMENT RESEARCH AND		Commandant	
DEVELOPMENT COMMAND		US Army Missile & Munitions Center	
Commander		and School	
US Army Armament Research and		ATTN: ATSK-CM	1
Development Command		Redstone Arsenal, AL 35809	
ATTN: DRDAR-LCA-L	1	Commander	
ATTN: DRDAR-LCE-C	1	US Army Logistics Center	
ATTN: DRDAR-LCU-CE	1	ATTN: ATCL-MG	1
ATTN: DRDAR-NC (COL Fields)	3	Fort Lee, VA 23801	
ATTN: DRDAR-SCA-T	1	Commandant	
ATTN: DRDAR-SCP	1	USAMP&CS/TC&FM	
ATTN: DRDAR-SCS	1	ATTN: ATZN-CM-C	1
ATTN: DRDAR-TDC (Dr. D. Gyorog)	1	ATTN: ATZN-CM-AD	2
ATTN: DRDAR-TSS	2	Fort McClellan, AL 36205	
ATTN: DRCPM-CAWS-AM	1	Commander	
Dover, NJ 07801		USAAVNC	
Commander		ATTN: ATZQ-D-MS	1
ARRADCOM		Fort Rucker, AL 36362	
ATTN: DRDAR-QAC-E	1		
Aberdeen Proving Ground, MD 21010			

Commander US Army Infantry Center ATTN: ATSH-CD-MS-C Fort Benning, GA 31905	1	Commander Naval Air Development Center ATTN: Code 2012 (Dr. Robert Helmbold) Systems Analysis Branch Warminster, PA 18974	1
Commander US Army Infantry Center Directorate of Plans & Training ATTN: ATZB-DPT-PO-NBC Fort Benning, GA 31905	1	US MARINE CORPS Director, Development Center Marine Corps Development and Education Command ATTN: Fire Power Division, D091 Quantico, VA 22134	1
Commander USA Training and Doctrine Command ATTN: ATCD-N Fort Monroe, VA 23651	1	DEPARTMENT OF THE AIR FORCE HQ AFLC/LOWMM Wright-Patterson AFB, OH 45433	1
Commander US Army Armor Center ATTN: ATZK-CD-MS ATTN: ATZK-DPT-PO-C Fort Knox, KY 40121	1 1	HQ AFSC/SDZ ATTN: CPT D. Riediger Andrews AFB, MD 20334	1
Commander USA Combined Arms Center and Fort Leavenworth ATTN: ATZL-CAM-IM Fort Leavenworth, KS 66027	1	USAF TAWC/THLO Eglin AFB, FL 32542	1
US ARMY TEST & EVALUATION COMMAND		AD/YQ Eglin AFB, FL 32542	1
Commander US Army Test & Evaluation Command ATTN: DRSTE-CM-F ATTN: DRSTE-CT-T Aberdeen Proving Ground, MD 21005	1 1	AFAMRL/TS ATTN: COL Dan Johnson Wright-Patterson AFB, OH 45433	1
DEPARTMENT OF THE NAVY Officer in Charge Marine Corps Detachment Naval Explosive Ordnance Disposal Technology Center Indian Head, MD 20640	1	OUTSIDE AGENCIES Battelle, Columbus Laboratories ATTN: TACTEC 505 King Avenue Columbus, OH 43201	1
Chief, Bureau of Medicine & Surgery Department of the Navy ATTN: MED 3C33 Washington, DC 20372	1	Toxicology Information Center, JH 652 National Research Council 2101 Constitution Ave., NW Washington, DC 20418	1
Commanding Officer Naval Weapons Support Center Applied Sciences Department ATTN: Code 50C, Bldg 190 Crane, IN 47522	1	ADDITIONAL ADDRESSEES Commander 217th Chemical Detachment ATTN: AFVL-CD Fort Knox, KY 40121	1

Headquarters
US Army Medical Research and
Development Command
ATTN: SGRD-RMS
Fort Detrick, MD 21701

1

Commander
US Army Armament Research and
Development Command
ATTN: DRDAR-SF
Dover, NJ 07801

1

Commander
US Army Environmental Hygiene Agency
ATTN: Librarian, Bldg 2100
Aberdeen Proving Ground, MD 21010

1

Commander
US Army Armament Materiel Readiness Command
ATTN: DRSAR-SF
Rock Island, IL 61299

1

Commander
Chemical Systems Laboratory
ATTN: DRDAR-CLM
Aberdeen Proving Ground, MD 21010

1

Commander
US Army Materiel Development and
Readiness Command
ATTN: DRCSF (Mr. P. Rutledge)
5001 Eisenhower Ave
Alexandria, VA 22333

1